

SILICON BRIDGE RECTIFIERS	REVERSE VOLTAGE - 50 to 1000Volts FORWARD CURRENT - 10/15/25 Amperes
<p>FEATURES</p> <ul style="list-style-type: none"> ● Surge overload rating -240~400 amperes peak ● Ideal for printed circuit board ● Reliable low cost construction utilizing molded plastic technique ● Plastic material has U/L flammability classification 94V-0 ● Mounting position: Any 	<p>GBU-C</p> <p style="text-align: center;">Dimensions in inches and (millimeters)</p>

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.
 Single phase, half wave ,60Hz, resistive or inductive load.
 For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	GBU 10005C	GBU 1001C	GBU 1002C	GBU 1004C	GBU 1006C	GBU 1008C	GBU 1010C	UNIT	
		15005C	1501C	1502C	1504C	1506C	1508C	1510C		
		25005C	2501C	2502C	2504C	2506C	2508C	2510C		
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	v	
Maximum RMS Voltage	V _{RMS}	30	70	140	280	420	560	700	v	
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	v	
Maximum Average Forward Rectified Current @ T _c =100°C (without heatsink)	I _(AV)	10		15		25			A	
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load (JEDEC Method)	I _{FSM}	3.0		3.2		4.2			A	
		GBU 10C	240	GBU 15C	300	GBU 25C	400		A	
Maximum Forward Voltage at 5.0/7.5/12.5A DC	V _F	1.1							V	
Maximum DC Reverse Current @ T _J =25°C at Rated DC Blocking Voltage @ T _J =125°C	I _R	10							500	uA
I ² t Rating for Fusing (t<8.3ms)	I ² t	200							A ² s	
Typical Junction Capacitance Per Element (Note1)	C _J	70							pF	
Typical Thermal Resistance (Note2)	R _{θJC}	2.2							°C/W	
Operating Temperature Range	T _J	-55 to +125							°C	
Storage Temperature Range	T _{STG}	-55 to +150							°C	

NOTES: 1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.
 2. Device mounted on 100mm*100mm*1.6mm cu plate heatsink.

RATING AND CHARACTERISTIC CURVES
GBU10/15/25(C)SERIES



FIG.1-MAXIMUM FORWARD SURGE CURRENT

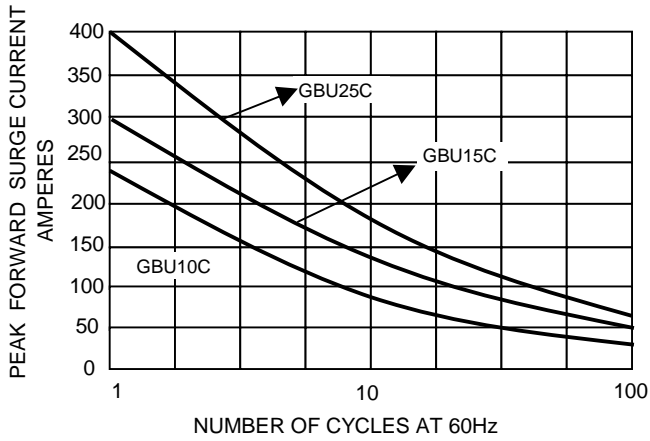


FIG.2- DERATING CURVE
 OUTPUT RECTIFIED CURRENT

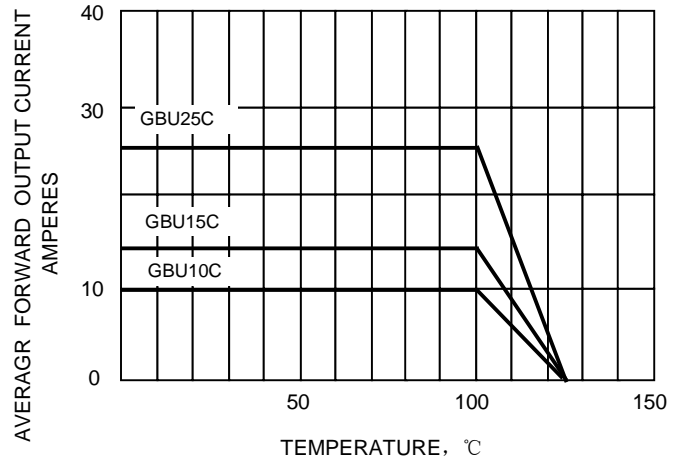


FIG.3-TYPICAL FORWARD CHARACTERISTICS

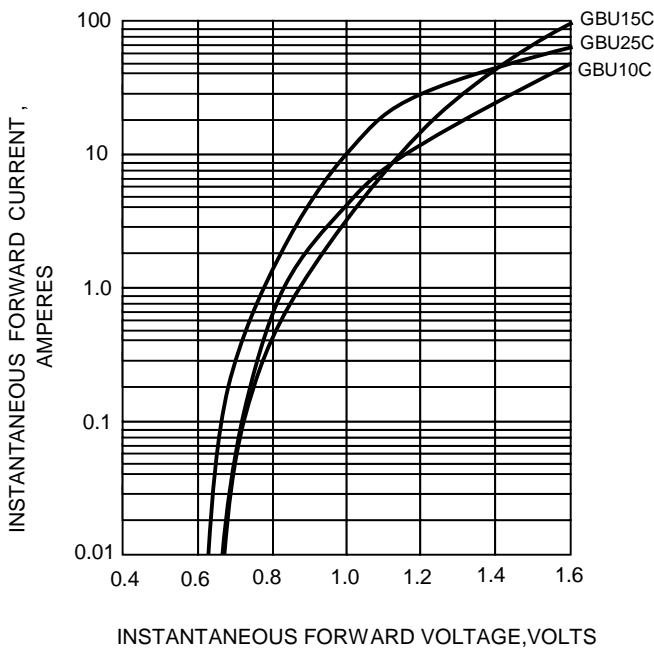


FIG.4-TYPICAL REVERSE CHARACTERISTICS

